



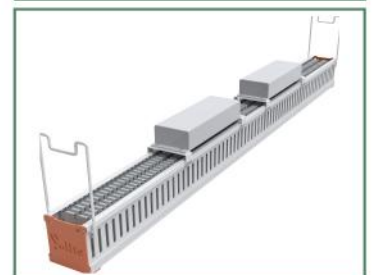


Demeter Top Light 660W

The Demeter Series is designed for the Greenhouse Operation

- The linear design fixture that can be used as Greenhouse top-light solution.
- Shadow free design: The Demeter Series is only 3.2" wide. Ensuring the fixture do not block the natural sunlight.
- Powerful and efficiency: The Efficacy of Demeter Series is 2.6 $\mu\text{mol}/\text{J}$ with Full-Spectrum.
- IP66 Waterproof and Industrial standard ensuring the fixture operate in Harsh and Humid Environment.

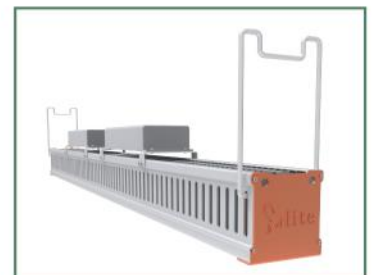

Demeter Series (Top Light 660W)

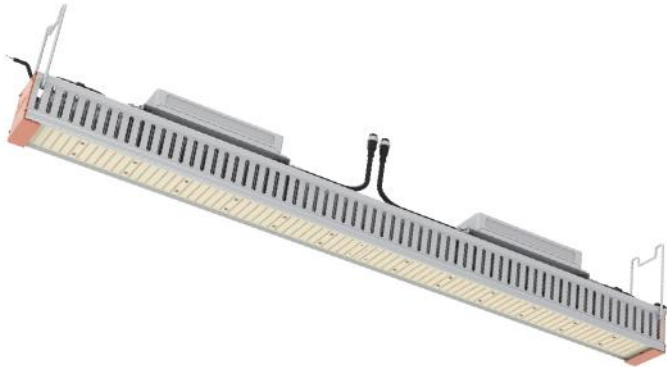




SPECIFICATIONS

Model	Demter Series TOP LIGHT 660W
Light Source	LED
PPF	1638 umol/s
Input Power	660W
Efficacy	2.6umol/J
Input Voltage	90-305V ^① 347V-480V ^②
Lifetime	>50,000 Hours
Dimming	0 - 10V
BTUs	2,150
Fixture Dimensions	48.0" L x 3.2" W x 5.4" H
Fixture Weight	20.5lbs
Certification	ETL Certified & IP66, CE
Warranty	3 Year Standard or 5 Year Extended Warranty

Max Amperage By Voltage Service

Voltage	120V	208V	240V	277V	480V
Amperage	5.25A	3.02A	2.65A	2.27A	1.32A

Enlite - Full Spectrum

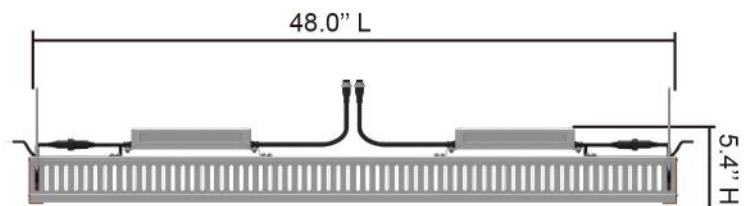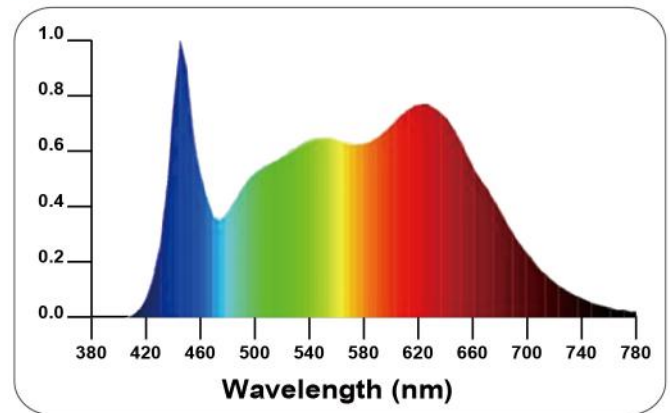

Series	MODEL	INPUT VOLTAGE	Beam Angle
Demerter	D-660W	1. 90-305V 2. 347-480V	120°